


# Operating manual

**MODEL:PC-300**

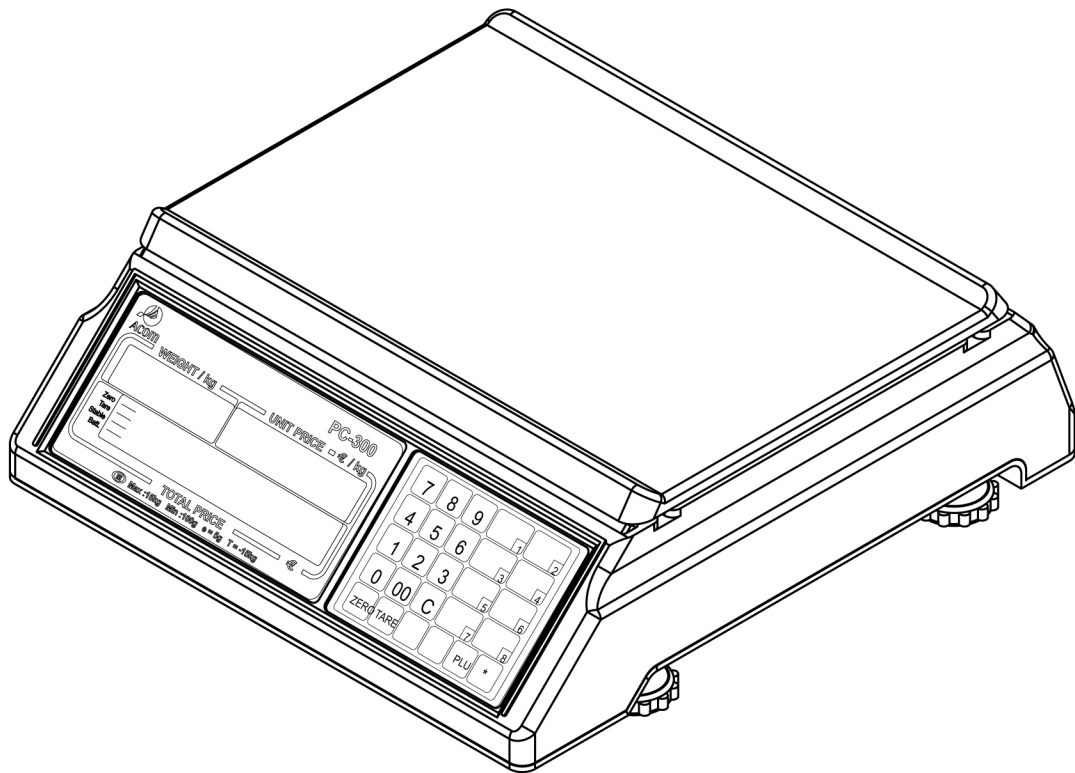

# Specifications

Model	SI-100			
	60kg	150kg	300kg	600kg
Min. Division(g)	20g	50g	100g	200g
Max. Tare	Full Tare			
A/D Speed	9 Times / 1 sec.			
Designators	Zero, Tare, Stable, Batt.			
Direct PLU Keys	Up to 6 Direct PLUs			
Vacuum	Weight : 5 Digits			
Fluorescent	Unit Price : 6 Digits			
Displays	Total Price : 6 Digits			
Operating Temp.	0°C through 40°C			
Humidity	Below than RH 85%			
Power Source	115, 230 VAC Adaptor 9V 300mA or Battery 1.5V x 6(option)			
Consumption	Approx. 1.4 W			
Product Size				
60kg, 150kg	(W)400mm x (D)675mm x (H)750mm			
300kg, 600kg	(W)510mm x (D)790mm x (H)750mm			
Weighing Pan Size				
60kg, 150kg	(W)400mm x (D)525mm			
300kg, 600kg	(W)510mm x (D)640mm			

# Safety Precaution

- Place the scale on a flat and rigid surface
- Place the scale far from strong RF interference
- Level the scale using its adjustable feet
- Do not subject the platter to sudden impacts
- Do not spill the water or any other liquid on the scale
- Do not use any solvents to clean the scale
- Do not remove the safety ground on the Adaptor

This is a “Table of Contents preview” for quality assurance

The full manual can be purchased from our store:

[https://the-checkout-tech.com/manuals/acom/PC-300 operating manual.html](https://the-checkout-tech.com/manuals/acom/PC-300%20operating%20manual.html)

And our free Online Keysheet maker:

<https://the-checkout-tech.com/Cash-Register-Keysheet-Creator/>

[HTTPS://THE-CHECKOUT-TECH.COM](https://THE-CHECKOUT-TECH.COM)