ISHIDA SCALES

CB-300/600
Electronic Balance

SERVICE MANUAL

ISHIDA SCALES MFG.CO., LTD.
44 SANNO-CHO SHOGOIN SAKYO-KU KYOTO 606 JAPAN

TABLE OF CONTENTS

You can help improve this manual by calling attention to errors and recommending improvements. Please convey your comments to the nearest Ishida Scales regional representatives.
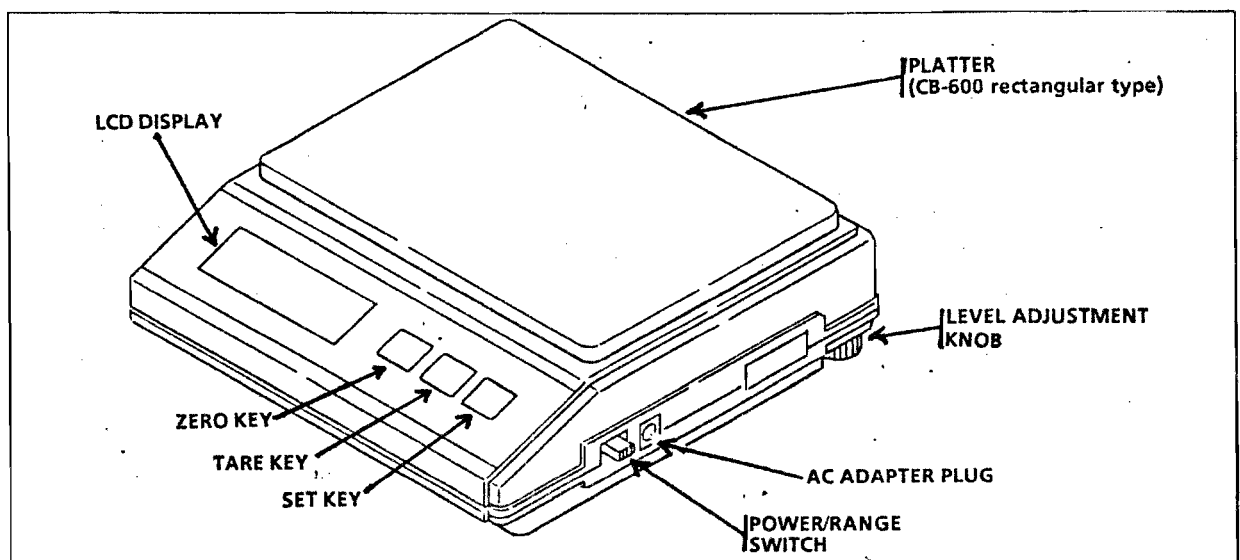
Thank you.

SPECIFICATIONS

●	CB-300	CB-600	Remarks
Capacity	300g (150g)	600g (300g)	() indicates LOW range.
Min. Grad.	0.1g (0.05g)	0.2g (0.1g)	Same as above.
Auto Zero	Standard feature.		
Accuracy	1/3000		
Display	Ishida custom made extra-large LCD.		
Checker Function	Buzzer rings and weight display flashes when weight exceeds target weight.		
Battery Level Warning	"B" displayed and weight flashes when battery level is low.		
External Dim.	192 mm (D) x 190 mm (W) x 67 mm (H)		
Platter Dimensions	Circular 130 mm dia.	Rectangular 170 mm x 130 mm	Optional platters available.
Electrical Power	Standard AC adapter. AC100V ± 10%. Batteries (nickel-cadmium).		Batteries optional.
Detector	Ishida high-performance load cell.		
Carrying Case	Portable case is standard equipment.		

EXTERNAL VIEW

External View of Electronic Balance

This is a "Table of Contents preview" for quality assurance

The full manual can be purchased from our store:

And our free Online Keysheet maker: