


SHARP®

ELECTRONIC CASH REGISTER

MODEL
ER-A440

INSTRUCTION MANUAL

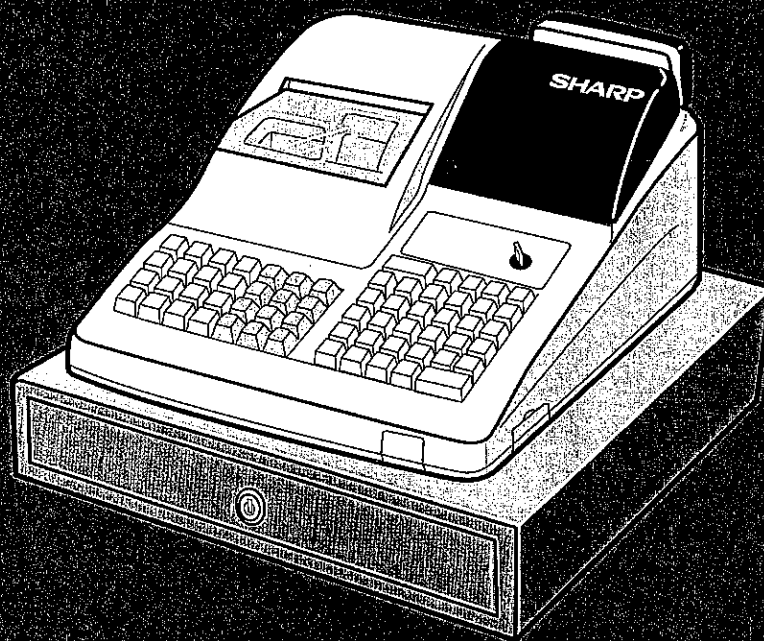

CAUTION

The socket-outlet shall be installed near the equipment and shall be easily accessible.

INTRODUCTION

Thank you very much for your purchase of the SHARP Electronic Cash Register, Model ER-A440. Please read this Manual carefully before operating your machine in order to gain full understanding of functions and features. Please keep this manual for future reference, it will help you, if you encounter any operational problems.

IMPORTANT

- **Install your ER-A440 in a location that is not subject to direct radiation, unusual temperature changes, high humidity or exposed to water sources.**
Installation in such locations could cause damage to the cabinet and the electrical components.
- **The register should not be operated by an individual with wet hands.**
The water could seep into the interior of the ER-A440 and cause component failure.
- **When cleaning your register, use a dry, soft cloth. Never use solvents, such as benzine and/or thinner.**
The use of such chemicals will lead to discoloration or deterioration of the cabinet.
- **The ER-A440 register plugs into any standard wall outlet (local voltage $\pm 10\%$ AC).**
Other electrical devices on the same electrical circuit could cause the ER-A440 to malfunction.
- **If the register malfunctions, call your local dealer for service - do not try to repair the register yourself.**
- **For a complete electrical disconnection, pull out the mains plug.**

PRECAUTION

This Electronic Cash Register has a built-in memory protection circuit which is operated by rechargeable batteries.

As you know, all batteries will, in time, dissipate their charge even if not used. Therefore to insure an adequate initial charge in the protection circuit, and to prevent any possible loss of memory upon installation, it is recommended that each unit be allowed to recharge for a period of 24 to 48 hours prior to use by the customer. In order to charge the batteries, the machine must be plugged in. This recharging precaution can prevent unnecessary initial service calls.



FIXING OF THE CASH REGISTER

To avoid instability of the cash register when the drawer is open, fix it to the platform by using the angle bracket on the bottom of the drawer and the supplied fixing angle bracket.

How to fix

- (1) Remove the dust from the part to attach the fixing angle bracket to.
- (2) Peel off the adhesive tape on the fixing angle bracket.
- (3) Hook the above-mentioned fixing angle bracket (B) into the angle bracket of the drawer (A) and attach the bracket (B) to the platform.

To move the cash register, lift up the front of the drawer (①) and pull it forward (②).

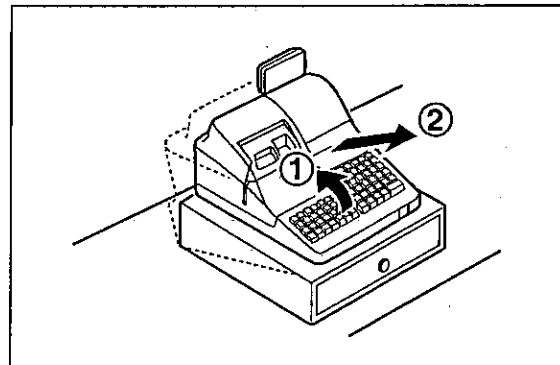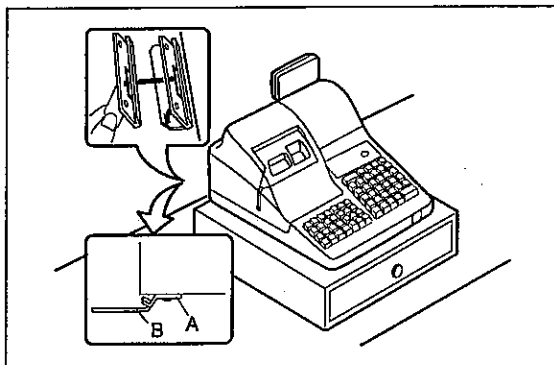

CONTENTS

INTRODUCTION.....	1
IMPORTANT.....	1
PRECAUTION.....	1
CONTENTS.....	2
EXTERNAL VIEW.....	6
Front view.....	6
Rear view.....	6
PRINTER.....	7
KEYBOARD.....	8
1 ER-A440 standard keyboard layout.....	8
2 Standard key number layout.....	9
KEYS AND SWITCHES.....	10
1 Mode switch and mode keys.....	10
2 Cashier code entry key.....	11
3 Receipt (ON-OFF) function.....	11
4 Drawer lock key.....	11
DISPLAYS.....	12
Machine state symbols.....	12

FOR THE OPERATOR

PRIOR TO ENTRIES.....	13
1 Preparations for entries.....	13
2 Error warning.....	13
ENTRIES.....	14
1 Item entries.....	14
Single item entries.....	14
Repeat entries.....	15
Multiplication entries.....	16
Split-pricing entries.....	17
Single item cash sale (SICS) entries.....	18
Linking PLU entries.....	19
Age verification (Birthday entry).....	19
2 Display of subtotals.....	20
Merchandise subtotal.....	20
Taxable subtotal.....	20
Including-tax subtotal (full subtotal).....	20
Food stamp-eligible subtotal.....	20
3 Finalization of transaction.....	21
Cash or check tendering.....	21
Mixed tendering (check + cash).....	21
Cash or check sale that does not need any tender entry.....	22
Charge (credit) sale.....	22
Mixed-tender sale (cash or check tendering + charge tendering).....	22
4 Food stamp calculations.....	23
Food stamp tendering.....	23
Food stamp status shift.....	24
5 Tax calculations.....	25
Automatic tax.....	25
Manual tax.....	25
Automatic-tax delete.....	26

Tax status shift	27
6 Auxiliary entries	28
Percent calculations (premium or discount)	28
Discount entries	29
Refund entries	30
Refund sales mode	30
Printing of non-add code numbers	30
7 Payment treatment	31
Currency conversion	31
Received on account entries	32
Paid out entries	32
No sale (exchange)	32
Cashing a check	33
Bottle return	33
8 Automatic sequencing key (AUTO key) entries	33
CORRECTION	34
1 Correction of the last entry (direct void)	34
2 Correction of the next-to-last or earlier entries (indirect void)	35
3 Subtotal void	36
4 Correction of incorrect entries not handled by the direct or indirect void function	36
CORRECTION AFTER FINALIZING A TRANSACTION (AFTER GENERATING A RECEIPT)	37
OVERRIDE ENTRIES	38
SPECIAL PRINTING FUNCTIONS	39
1 Copy receipt printing	39
2 Validation printing function	40
Validation slip setting and printing	40
Validation printing examples	40
Validation slip specification	43
3 Printing of the employee arrival and departure times	43
TIME DISPLAY AND AUTOMATIC UPDATING OF THE DATE	44
1 Time display	44
2 Automatic updating of the date	44

FOR THE MANAGER

PRIOR TO PROGRAMMING	45
1 General instructions	45
2 How to program alphanumeric characters	45
Using character keys on the keyboard	45
Entering character codes	46
PROGRAMMING	48
Preparations for Programming	48
Direct Programming	48
1 Setting the date and time	48
Date	48
Time	49
2 Programming for departments	49
Unit price	49
Functional selection	50
3 Price lookup (PLU) programming	52
Unit price	52
Functional selection	52
PLU assignment to departments	54
4 Programming for discount keys	55
Discount amount (⊖)	55
High amount lockout (HALO), food stamp status, and tax status (⊖)	56

5	Programming for percent keys	57
	Percent rate (%)	57
	Sign (+/-), food stamp status, and tax status (%)	57
6	Programming for conversion keys	58
	Currency conversion rate (CONV)	58
7	Programming for the CA2, RA, PO, CH, CHK, and TAX keys	58
	High amount lockout (HALO) (CA2, RA, PO, CH, CHK, and TAX)	58
8	Programming for the automatic tax calculation function	59
	Tax table (applicable to the add-on tax)	59
Job-Code-Based Programming		62
1	Setting the date and time	62
	Setting the date (#2610)	62
	Setting the time (#2611)	63
2	Setting the register and consecutive numbers	63
	Setting the register number (#2612)	63
	Setting the consecutive number (#2613)	64
3	Programming for the automatic tax calculation function	65
	The tax table (#2710)	65
	The tax rate (#2711)	67
	Doughnut tax exempt (for the Canadian tax system) (#2715)	68
4	Programming for departments	69
	Functional programming 1 (#2110)	69
	Functional programming 2 (#2111)	71
	A limit amount (HALO) of entry (#2112)	72
	Alphanumeric characters (#2114)	73
	Unit price (#1110)	74
	Group number (#2116)	74
	Age limitation (#2180)	75
	Department key positioning (#2119)	76
5	Price lookup (PLU) programming	77
	Department assignment (#1200, 2230)	78
	Unit prices (#1210)	79
	Base quantity (#1211)	80
	PLU/subdepartment mode (#2210, 2231)	81
	Sign (+/-), food stamp status, and tax status (#2211, 2232)	82
	Alphanumeric characters (#2214)	83
	Age limitation (#2280)	84
	Linked PLU numbers (#2220)	85
	Direct PLU key positioning (#2219)	85
6	Programming for miscellaneous keys	86
	Programming the rate (%), (CONV) and the discount (⊖) (#1310)	86
	A limit amount (HALO) of entry (⊖, TAX, RA, PO) (#2312)	87
	+/- sign, food stamp status and tax status (%), (⊖) (#2311)	87
	% item or % subtotal selection (%) (#2315)	89
	Percent rate limitation (%) (#2313)	89
	Vendor or store coupon selection (⊖) (#2316)	90
7	Programming for the CAAT, CA2, CHK, CHK2, and CH thru CH5 keys	91
	Functional programming (#2320)	91
	Tax delete (#2326)	93
	High amount lockout (HALO) for check change, check cashing, and cash in drawer (#2321)	94
	High amount lockout (HALO) of entry for media keys (#2322)	94
8	Programming alphanumeric characters	95
	Programming (#2314)	95
	Characters of function keys	96
9	Cashier programming	98
	Cashier code (#1500)	98

Cashier name (#1514).....	99
Assigning cashiers to drawers (#2510)	99
10 Programming various functions	100
Programming for optional feature selection (#2616)	100
Programming the limit on the number of times of validation printing (#2615)	103
Setting the time limit for THE TILL TIMER™ (#2617)	103
Programming of print messages (#2614)	104
Selection of X1/Z1 and X2/Z2 reports to be printed in the stacked report sequence (#2620).....	105
Setting the time range for hourly reports (#2619).....	106
RS-232C channel assignment (#2690)	106
Secret codes to control access to the PGM1 mode, X1/Z1 mode, and X2/Z2 mode (#2630, 2631, 2632)	107
Setting the AUTO key (#2900)	108
11 Activating and deactivating the TRAINING mode.....	109
TRAINING-mode activation/deactivation (#2910, 2911)	109
TRAINING-mode operations	109
12 Reading stored programs	110
Program details and procedures for their reading	110
Sample printouts.....	111
READING (X) AND RESETTING (Z) OF SALES TOTALS.....	116
1 Summary of reading (X) and resetting (Z) reports and the key operations to obtain the reports	116
2 Daily sales totals.....	118
Full reading and resetting of sales totals	118
Cashier reading and resetting	121
Reading and resetting of hourly sales information	123
Full department reading	124
Individual group reading	124
Full group reading.....	124
Reading and resetting of sales information on a range of PLUs/subdepartments	125
Reading of sales information on PLUs/subdepartments associated with an individual department.....	126
Reading of sales information on PLUs/subdepartments whose sales amounts are zeros.....	126
Reading of sales information on the price amount range of PLUs/subdepartments	126
Transaction reading.....	127
Cash in drawer reading	127
Reading and resetting of a stacked report.....	127
3 Periodic consolidation.....	128
Generality	128
Reading and resetting of daily net totals	129
Reading and resetting of a stacked report.....	129
OPERATOR MAINTENANCE	130
1 In case of power failure	130
2 In case of printer's motor locking.....	130
3 Paper roll near-end sensing function (only for the journal paper) <option>.....	131
4 Installing and removing the paper roll.....	131
Installing the paper roll	132
Removing the paper roll	133
Removing a paper jam	134
Recording paper specifications	134
5 Installing the ink ribbon cassette	135
6 Removing the till and the drawer	136
7 Opening the drawer by hand	136
8 Before calling for service	137
Error code table.....	137
LIST OF OPTIONS	138
SPECIFICATIONS	139

This is a “Table of Contents preview” for quality assurance

The full manual can be purchased from our store:

[https://the-checkout-tech.com/manuals/sharp/ER-A440 instruction manual.html](https://the-checkout-tech.com/manuals/sharp/ER-A440%20instruction%20manual.html)

And our free Online Keysheet maker:

<https://the-checkout-tech.com/Cash-Register-Keysheet-Creator/>

[HTTPS://THE-CHECKOUT-TECH.COM](https://THE-CHECKOUT-TECH.COM)