




DS-688F USER'S GUIDE



DISPLAY & KEYBOARD PANEL

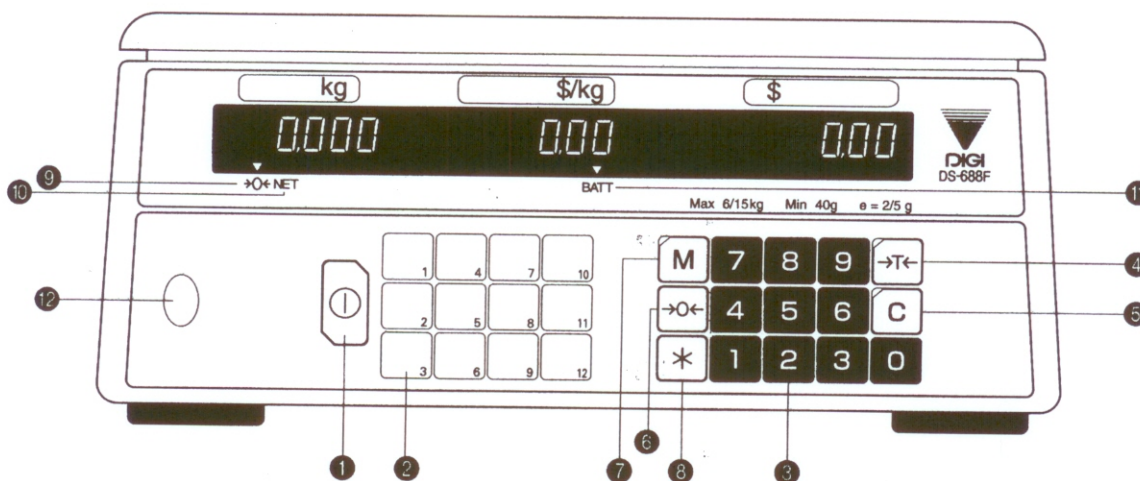

OPERATION KEYS

FUNCTIONS

- 1 On/Off Key — Turns the power on or off.
- 2 Preset Keys — Set up or call unit price.
- 3 Numeric Keys — Input numerical values.
- 4 Tare Key — Sets or clears tare value.
- 5 Clear Key — Clears numerical values.
- 6 Re-zero Key — Resets weight display to zero.
- 7 Mode Set Key — Enters into Preset and program mode.
- 8 * Key — NOT IN USE.

INDICATORS


- 9 Zero Indicator — Lights on when zero point is adjusted and weight is stable.
- 10 Net Indicator — Lights on when tare subtraction is effective.
- 11 Battery Indicator — Lights on when battery is weak and needs to be charged.
- 12 Level Indicator — Used for Level Adjustment.

Note: Operation Keys and Indicators may differ in certain countries.

PRE-OPERATION

1) Level Adjustment

- a. Place scale on firm and flat base.
- b. Level the scale by turning adjusting legs until air bubble is at the center of the level indicator.

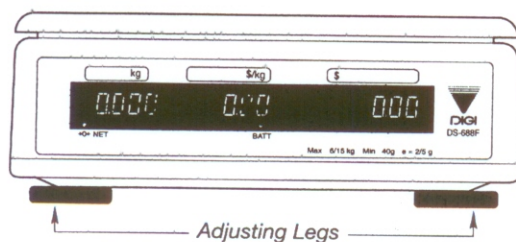

2) Power supply

- a. When the AC Power cable is plugged in and the optional battery is built-in, DS-685F works with the AC power.
- b. When the optional battery is built-in, but the AC Power cable is not plugged in, DS-685F can be operated with the battery.
- c. The battery will be automatically re-charged when the AC Power cable is plugged in, whether or not the ON/OFF switch is on.

Note: With the fully charged battery, DS-688F can be operated for 8 hours. And 18 hours are needed for full-recharging.

This is a “Table of Contents preview” for quality assurance

The full manual can be purchased from our store:

[https://the-checkout-tech.com/manuals/Digi/DS-688F user guide manual.html](https://the-checkout-tech.com/manuals/Digi/DS-688F%20user%20guide%20manual.html)

And our free Online Keysheet maker:

<https://the-checkout-tech.com/Cash-Register-Keysheet-Creator/>

[HTTPS://THE-CHECKOUT-TECH.COM](https://THE-CHECKOUT-TECH.COM)